

Embraco NEU2178GK, compressor

Site: Mbsmpro

Date: January 2, 2026 | **Author:** www.mbsmpro.com

URL: <https://mbsmpro.com/embraco-neu2178gk-compressor/>



Mbsmpro.com, Embraco, NEU2178GK, 1 HP, LBP, R404A, 220-240V, 50Hz, 16.8 cc, CSR, Commercial Freezer Compressor

The Cold Heart of Commercial Freezing: Embraco NEU2178GK

If you are an **artisan bricoleur** or a refrigeration technician working on commercial island freezers or restaurant reach-ins, you have likely encountered the **Embraco NEU2178GK**. This isn't your standard domestic fridge compressor; this is a **1 HP** powerhouse designed for the heavy lifting required by **Low Back Pressure (LBP)** applications using **R404A** or **R507** refrigerant.

Known for its robust "Made in Slovakia" build, the NEU2178GK is a **CSR (Capacitor Start, Capacitor Run)** motor. This is a critical detail for technicians: unlike simpler PTCSCR compressors, this unit relies on a precise electrical box containing both a start capacitor and a run capacitor to manage its high starting torque (HST). It is the engine you choose when you need reliability in a -30°C environment.

Why the "GK" Matters

In Embraco's nomenclature, the "K" at the end (as in NEU2178GK) often signifies a specific motor type—in this case, one designed for **High Starting Torque**. This means it can restart even if pressures haven't fully equalized, a common scenario in busy commercial kitchens where doors are opened frequently.

Technical Specifications: The Data You Need

Here is the breakdown of the technical capabilities of this compressor.

Feature	Specification
Model	NEU2178GK
Brand	Embraco (Nidec)
Horsepower (HP)	1 HP
Displacement	16.80 cm³ (cc)
Refrigerant	R404A / R507 / R452A
Application	LBP (Low Back Pressure)
Voltage	220-240V ~ 50Hz
Cooling Capacity	~900 W (at -23.3°C ASHRAE)
Motor Type	CSR (Capacitor Start & Run)
Start Capacitor	88 - 108 μF / 330V
Run Capacitor	15 μF / 400V
Oil Type	POE 22 (Polyolester)
Oil Charge	350 ml
Expansion Device	Capillary or TXV (Expansion Valve)

Exploitation: Installation Tips for the Artisan

Installing a 1 HP commercial compressor is different from swapping a domestic one. Here are the “golden rules” for the NEU2178GK:

1. **The Electric Box is Mandatory:** You cannot bypass the capacitor box. This motor needs the **15μF run capacitor** to maintain efficiency and keep the windings cool, and the **start capacitor** to kick the rotor into motion against high head pressure.

2. **Moisture is the Enemy:** This compressor comes filled with **POE oil**. POE is like a sponge for humidity. If you leave the plugs open for more than 15 minutes, the oil absorbs moisture that vacuum pumps cannot remove. *Keep it sealed until the last second.*
 3. **Nitrogen Sweep:** Because R404A systems use POE oil, any carbon from brazing will turn into sludge and block the capillary tube immediately. Always braze with a trickle of nitrogen flowing through the pipes.
 4. **R452A Compatibility:** If R404A is expensive or restricted in your area, this compressor is often compatible with **R452A**, a drop-in replacement with a lower GWP (Global Warming Potential), but always check the discharge temperature.
-

Comparison: Embraco NEU2178GK vs. The Competition

When you can't find the exact Embraco model, you need a replacement. Here is how it stacks up against the heavyweights from Secop and Tecumseh.

Compressor Brand	Approx. HP	Displacement	Verdict
NEU2178GK Embraco	1 HP	16.8 cc	Best for high-torque commercial freezers.

Compressor Brand	Approx. HP	Displacement	Verdict
SC21CL	Secop (Danfoss)	~7/8 - 1 HP 20.95 cc	Older design, physically larger, very reliable.
CAJ2464Z	Tecumseh	1.5 HP 34.4 cc	Much more powerful; usually overkill for this slot.
NT2180GK	Embraco	1 HP 20.4 cc	The “big brother” of the NEU series; fits if you have space.

Pro Tip: If replacing a **Secop SC21CL** with this **Embraco NEU2178GK**, you may need to adjust the pipework as the Embraco is slightly more compact (lower height: ~206mm vs Secop ~219mm).

Performance Analysis: Power Consumption


One reason technicians love the **NEU series** is efficiency.

- **Current (Amps):** At typical freezer conditions (-25°C), it draws about **4.3 Amps**.
 - **LRA (Locked Rotor Amps):** 21.0 A. If your clamp meter reads 21A instantly and stays there, your compressor is mechanically seized or the start capacitor is dead.
-

Performance Analysis: Power Consumption

One reason technicians love the **NEU series** is efficiency.

- **Current (Amps):** At typical freezer conditions (-25°C), it draws about **4.3 Amps**.
 - **LRA (Locked Rotor Amps):** 21.0 A. If your clamp meter reads 21A instantly and stays there, your compressor is mechanically seized or the start capacitor is dead.
-

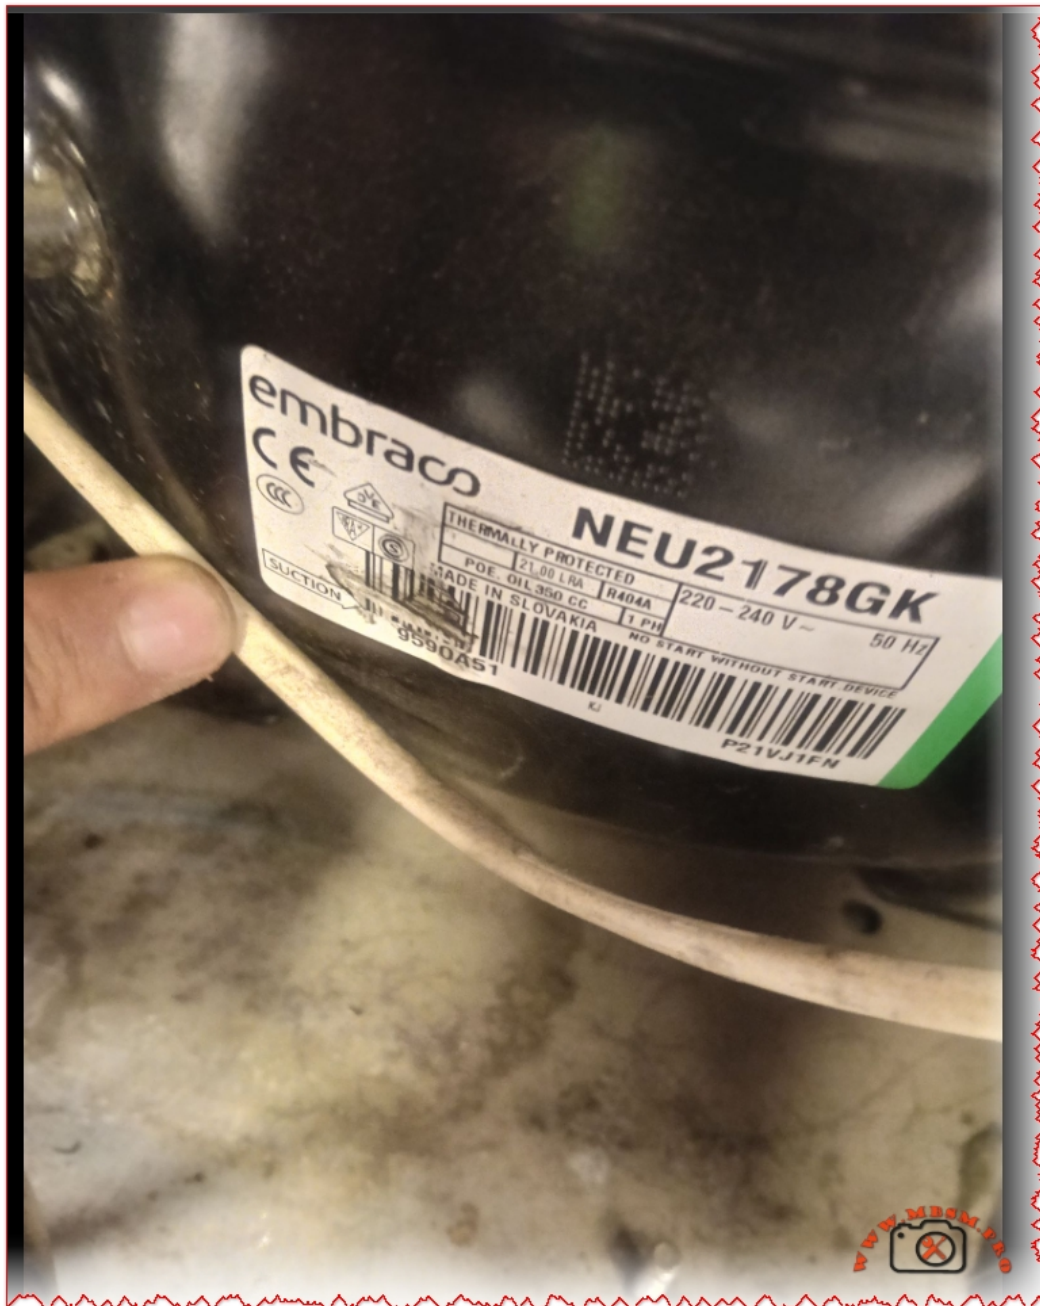

Focus Keyphrase: Embraco NEU2178GK 1 HP Compressor R404A

SEO Title: Mbsmpro.com, Embraco, NEU2178GK, 1 HP, LBP, R404A, 220-240V, 50Hz, 16.8 cc, CSR, Commercial Freezer

Meta Description: Discover the Embraco NEU2178GK 1 HP Compressor (R404A/LBP). Full technical specs, CSR wiring guide, and comparisons with Secop and Tecumseh for commercial refrigeration repairs.

Slug: embraco-neu2178gk-1-hp-compressor-r404a-lbp-specs

Tags: Mbsmgroup, Mbsm.pro, mbsmpro.com, mbsm, Embraco NEU2178GK, 1 HP Compressor, R404A, Commercial Freezer, CSR Motor, NEU2178GK Specs, Refrigeration Repair, 16.8cc Compressor

Excerpt: The Embraco NEU2178GK is the definitive choice for 1 HP commercial freezing applications. Featuring a robust CSR motor and 16.8cc displacement, this R404A compressor delivers high starting torque for demanding environments. This guide details the electrical requirements, installation tips, and how it compares to Secop and Tecumseh alternatives.

[embraco-compressorDownload](#)

Latest Articles

- [Guide de Dépannage de la Carte Inverter : Climatiseur Kolin KSM-IW20WAE](#)
- [RCFF-2HP Capillary Tube for a Samsung 18000 BTU air conditioner](#)
- [Carbon brushes washing machine motors](#)
- [Chauffe-eau Junkers : Restauration d'un Classique](#)
- [WS57H Compressor, 1/6 hp, Capacitor Requirement 4mf](#)
- [Hisense inverter expert, installtion](#)
- [Copeland D3DS5-100X 10 HP Freezer Compressor](#)
- [Bitzer 6G-30.2Y: The High-Performance 30 HP Semi-Hermetic](#)
- [Réparer un chauffe-eau à gaz Olympic 6L](#)
- [Best piping practices for semi-hermetic systems](#)
- [Core ChauffeEau Junkers Mid-1980s to Late 1990s](#)
- [Not recommended R410A to R407c](#)

- Details of refrigerant R134a
- The electrical circuit for a timer-based steam refrigerator is an interesting one
- Changing Filter 1/5 Hp
- 1/5 HP Compressor oil change: How much and how to do it right
- Deep cleaning AC units from A to Z... that's our craft
- Plumbing Fittings Explained
- Can the GL80 compressor be installed in place of the GL90?
- The process of replacing the air conditioner compressor is successful, and it is working as it was before ?