

Compresseurs Embraco, ,EMU70HLC , R134a, 220 V, 50Hz, 1/5 HP, 149 watts , 180 mL

Category: Technologie,Tester ok

written by www.mbsm.pro | 26 April 2020

Compresseurs Embraco, ,EMU70HLC , R134a, 220 V, 50Hz, 1/5 HP, 149 watts , 0.17
kW (0.2214 BHP) ,180 mL

Compressor, hermetic, piston, Embraco, NE1130Z, 1/3 hp, LBP, 12.11 cm³, r134a

Category: compressor

written by Amina | 26 April 2020



Private Picture Copyright : WWW.MBSM.PRO

Compressor, hermetic, piston, Embraco, NE1130Z, 1/3 hp, LBP, 12.11 cm³, r134a

Mbsm.pro, QXA-C133B030gA, Compressor
GREE, PANASONIC, 12000 Btu, R410,
2JS464D3CA02, 24000 Btu, r22

Category: compressor,expertise

written by www.mbsm.pro | 26 April 2020

2JS464D3CA02

THERMALLY PROTECTED R22

1PH 50Hz 220/240V ~

Matsushita Electric Industrial Co., Ltd.

SERIAL NO. J46D C0063914

7077290

MADE IN MALAYSIA



WARNING / DANGER



Danger of Electric Shock

- Earth the equipment.
- Disconnect power before work.
- Mount the terminal cover in place.



Danger of Explosion or Fire

- Do not use unprescribed refrigerants and oils.
- Do not compress air.
- Wear protective goggles.



Caution , Hot Surface

- Do not touch with bare hands.

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, QXA-C133B030gA, Compressor GREE, PANASONIC, 12000 Btu, R410,
2JS464D3CA02, 24000 Btu,r22

Mbsm.pro, Compressor, inverter, VTZ121AGNR1B, 60000 btu, air conditioning

Category: air conditioner,compressor
written by Jamila | 26 April 2020

Danfoss Commercial Compressors


Model no: VTZ121AGNR1B



Serial no: AL1006034653



CAUTION: Variable speed compressor electric supply via Danfoss CDS frequency converter only



Friedl
MMA
7M

2010 Refrigerant: R404A-R507A-R407C-R134a

WARNING

Mbsm.pro, Kiriazi Refrigerator, 14 Feet, Classic, ,330 Liter, Defrost, KR350/2, KR350, R134a, 160g, Compressor, 1/4 hp, Lbp

Category: Refrigerator

written by www.mbsm.pro | 26 April 2020



Mbsm.pro, Kiriazi Refrigerator, 14 Feet, Classic, ,330 Liter, Defrost, KR350/2, KR350, R134a, 160g, Compressor, 1/4 hp, Lbp

COMPRESSEUR, EMBRACO, ASPERA,

NEK6213GK, HMBP, 1/2+ hp, 614 W

Category: compressor

written by www.mbsm.pro | 26 April 2020

- Puissance frigorifique à -10°C 1305 W
- Puissance électrique à -10 °C 614 W
- Puissance en cheval 1/2+ CV
- Alimentation 220-240 V 50 Hz
- Gaz R404a/R507 HMBP
- Moyenne et haute pression
- Complet avec starter, condensateur, boîtier et système de fixation

Codes fabricants

- ALPENINOX (anciennement NE9213GK)
- ASCASO-VF.792 (anciennement NE9213GK)
- ASPERA-NE9213GK (anciennement NE9213GK)
- ELECTROLUX-85551 (anciennement NE9213GK)
- EMBRACO-NE9213GK (anciennement NE9213GK)
- EUNASA-21075 (anciennement NE9213GK)
- EURFRIGOR-RB000447 (anciennement NE9213GK)
- ITV-302035 (anciennement NE9213GK)
- WHIRLP00L-485409918033 (anciennement NE9213GK)
- ZANUSSI-85551 (anciennement NE9213GK)
- ALPENINOX-91161
- ANGELO PO-3138720
- ASPERA-NEK6213GK
- ASPERA-NEK6213GK-CSIR
- ELECTROLUX-91161
- EMBRACO-NEK6213GK
- EMBRACO-NEK6213GK-CSIR
- EMMEPI-8C1300
- FAST RICAMBI-605.125
- GEV-605.125
- MIGEL-1RF173
- SAGI-3138720
- UGOLINI-22807-13010
- VND-605.125
- ZANUSSI-91161

Compressor ASPERA NEK6213GK | NEK 6213 GK

Refrigerant	R404A/R507
Working range[stC] MBP	-20 do +10
Nominal capacity [W] (evaporating temperature +7,2C, Condensing temperatur +54,4C)	1761
Power supply	220-240V 50Hz
Engine type	CSIR
Displacement [cm³]	12,11
Weight [kg]	11,6
Evaporating temperature +55 C	

Evaporating Temperature	Cooling Capacity +/-5%			Power Consumption +/-5%	Current Consumption +/-5%	Gas Flow Rate +/-5%	Efficiency +/-7%	
°C	(kcal/h)	(W)	(Btu/h)	(W)	(A)	(kg/h)	(kcal/Wh)	(W/W)
-20	514	598	2.040	569	3,87	16,07	0,90	1,05
-15	643	747	2.551	642	4,13	20,19	1,00	1,16
-10	793	922	3.148	717	4,41	25,09	1,11	1,29
-5	966	1.124	3.835	792	4,70	30,85	1,22	1,42
0	1.163	1.352	4.615	868	5,02	37,57	1,34	1,56
5	1.384	1.610	5.493	946	5,36	45,32	1,46	1,70
10	1.631	1.896	6.472	1.025	5,72	54,18	1,59	1,85

Substitutes for this compressor are: Electrolux/Cubigel MP12TB ,
Danfoss/Secop SC10DL , L'Unite Hermetique/Tecumseh CAE9470Z

R404A

Refrigerant: ,

R507

COMPRESSEUR EMBRACO NEK6213GK

220/240V 50Hz

puissance 1/2 Hp, le déplacement 12,12 cc

gaz réfrigérant R404a/R507 HMBP

LES CODES DE FABRICANT

091161 **ALPENINOX**

3138720 **ANGELO PO**

NEK6213GK **ASPERA**

NEK6213GK-CSIR **ASPERA**

091161 **ELECTROLUX PROFESSIONNEL**

NEK6213GK **EMBRACO**

NEK6213GK-CSIR **EMBRACO**

8C1300 **EMMEPI**

1RF173 **MIGEL**

3138720 **SAGI**

22807-13010 **UGOLINI**

091161 **ZANUSSI**

Alimentation

220/240 V-50 Hz-1 Ph

Chevaux

1/2 hp

Déplacement

12,11 cm³

Application

MHBP

**Capacité frigorifique en conditions ASHRAE,
R404A/R507**

1,76 kW

**Capacité frigorifique en conditions EN12900 MT,
R404A/R507**

0,97 kW

Réfrigérant

R404A, R452A, R507A

Aspiration

3/8"

Refoulement

1/4"

Poids

11,60 kg

Hauteur maximale

206 mm

LRA

19,30 A

Huile de recharge	350 cm3
Type d\'huile	P0E 22 ester
Autres remarques	Accessoires de démarrage inclus
Technologie	Vitesse fixe
Type de refroidissement moteur	Ventilateur
Type moteur	CSIR
Type protection moteur	External

Specifications techniques

Réfrigérant	R-404A - R-507A	Technologie de compresseur	Hermétique à piston
Application	Moyenne pression - Haute pression	Plage d\'application	-20°C à +10°C
Type de tension	Monophasé	Tension	240 / 1 / 50
Cylindrée	12.1cm3	Puissance frigorifique @ -10°C	918W
Intensité maximale	6.01A	Type moteur	CSIR
Détente	Capillaire / Détendeur	Diamètre aspiration ODF	5/16"
Diamètre refoulement ODF	1/4"	Entraxes de fixation	170 x 70mm
Hauteur	206mm	Charge d\'huile	0.35l

Private Picture Copyright : WWW.MBSM.PRO



Private Picture Copyright : WWW.MBSM.PRO

Mbsm_dot_pro_private_PDF_nek6213GK-Catalogue_EmbracoTélécharger
Mbsm_dot_pro_private_PDF_nek6213GK-Catalogue_Embraco-1Télécharger

Designation	NEK6213GK
Nominal Voltage/Frequency	220-240 V 50 Hz
Engineering Number	959BA51

A - APPLICATION / LIMIT WORKING CONDITIONS

1 Type	Hermetic reciprocating compressor		
2 Refrigerant	R-404A		
3 Nominal voltage and frequency	220-240 / 50	[V / Hz]	
4 Application type	Medium Back Pressure (Commercial Compressors R404A)		
4.1 Evaporating temperature range	-20°C to 0°C	(-4°F to 32°F)	
5 Motor type	CSIR		
6 Starting torque	HST - High starting torque		
7 Expansion device	Capillary tube or Expansion valve		
8 Compressor cooling	Operating voltage range		
		50 Hz	60 Hz
8.1 LBP (32°C Ambient temperature)	-	-	-
8.2 LBP (43°C Ambient temperature)	-	-	-
8.3 HBP (32°C Ambient temperature)	-	-	-
8.4 HBP (43°C Ambient temperature)	-	-	-
9 Maximum condensing pressures/temperature			
9.1 Operating (gauge)	25.7	[kgf/cm²] (365 psig)	/ °C - °F
9.2 Peak (gauge)	28.7	[kgf/cm²] (408 psig)	/ °C - °F
10 Maximum winding temperature	130	[°C]	

B - MECHANICAL DATA

1 Commercial designation	1/2+	[hp]
2 Displacement	12.11	[cm ³] (0.739 cu.in)
2.1 Bore	27.775	
2.2 Stroke	10.000	
3 Lubricant charge	350	[ml] (11.84 fl.oz.)
3.1 Lubricants approved		
3.2 Lubricants type/viscosity	ESTER / ISO22	
4 Weight(with oil charge)	11.6	[kg] (25.57 lb.)
5 Nitrogen charge	0.2 to 0.3	[kgf/cm ²] (2.84 to 4.27 psig)

C - ELECTRICAL DATA

1 Nominal Voltage/Frequency/Number of Phases	220-240 V 50 Hz 1 ~ (Single phase)	
2 Starting device type	Current Relay	
2.1 Starting device		
3 Start capacitor	53-64(330)	[µf(VAC minimum)]
4 Run capacitor	-	[µf(VAC minimum)]
5 Motor protection (external)	T0743/G6	
6 Start winding resistance	20.88	[Ω at 25°C (77°F)] +/- 8%
7 Run winding resistance	3.93	[Ω at 25°C (77°F)] +/- 8%
8 LRA - Locked rotor amperage (50 Hz)	-	[A] - Measured according to UL 984
9 FLA - Full load amperage LMBP (50 Hz)	-	[A] - Measured according to UL 984
10 FLA - Full Load Amperage HBP (50 Hz)	-	[A] - Measured according to UL 984
11 Approval boards certification	IMQ	

Tableau de conversion d'unités

Category: Technologie

written by www.mbsm.pro | 26 April 2020

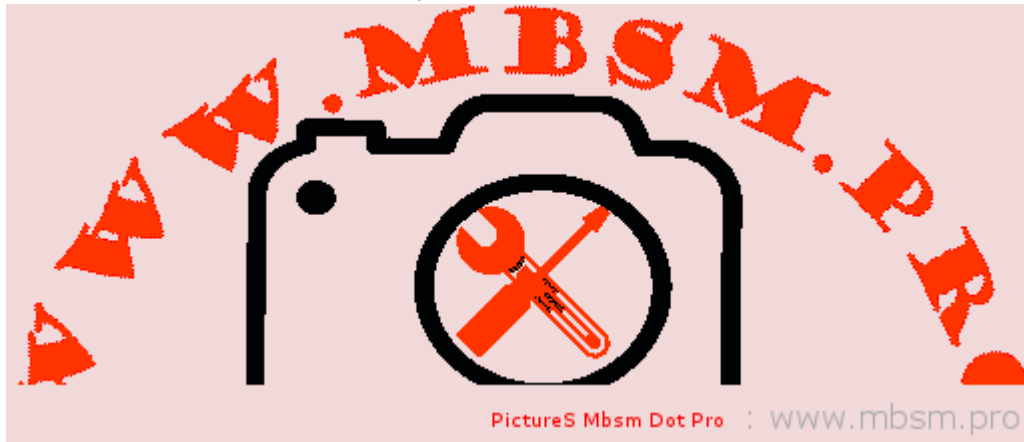


Tableau de conversion d'unités

Mbsm.pro, Compressor, Huaguang, asq80hg, Q series, 800 w, Hbp, r134a, 1/4 hp, cooling Application

Category: compressor

written by www.mbsm.pro | 26 April 2020



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, Huaguang, asq80hg, Q series, 800 w, Hbp, r134a, 1/4 hp, cooling Application

Mbsm.pro, COMPARE, K2-C239ELFCEF, AND, LG ,T182SC

Category: compressor

written by www.mbsm.pro | 26 April 2020



K2-C239ELFCEF

1PH 50 Hz 220-240 V ~

(OK)

LRA 35 A 1362-1398 W R-22



RoHS

203008338

QINGDAO TECO PRECISION MECHATRONICS CO.,LTD.

Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, COMPARE, K2-C239ELFCEF, AND, LG ,T182SC

Mbsm.pro, Compressor, PW4.5VK, 1/8hP, 128 W, PW5.5VK, 1/6hP, 148 W, PW6.5VK, 1/5hP, 168 W, r134a, 1ph220v, watercooler, freezing

Category: compressor

written by www.mbsm.pro | 26 April 2020



Private Picture Copyright : WWW.MBSM.PRO

Mbsm.pro, Compressor, PW4.5VK, 1/8hP, 128 W, PW5.5VK, 1/6hP, 148 W, PW6.5VK, 1/5hP, 168 W, r134a, 1ph220v, watercooler, freezing