


Transistor IGBT, G80N60UFD, 600 V, 80 A

Site: Mbsmpro

Date: January 12, 2026 | **Author:** www.mbsmpro.com

URL: <https://mbsmpro.com/transistor-igbt-g80n60ufd-600-v-80-a/>

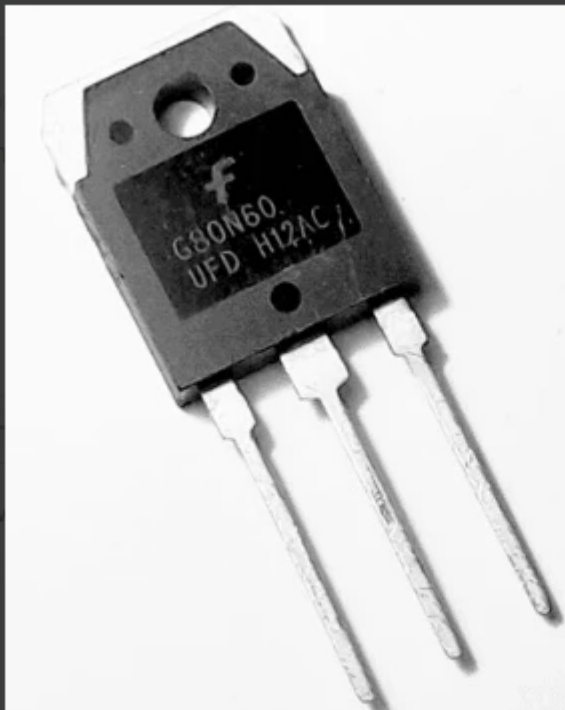

Mbsmpro.com, Transistor IGBT, G80N60UFD, 600 V, 80 A, Ultrafast, TO-3P,
Motor Drive, Inverter, Induction Heating, Welding, UPS, PFC

Overview of the G80N60UFD Ultrafast IGBT 600 V, 80 A

The **G80N60UFD** is an *ultrafast insulated-gate bipolar transistor (IGBT)* designed for high-efficiency power conversion around **600 V DC buses and up to 80 A collector current**.

It uses Fairchild / ON Semiconductor UFD technology with a co-pack fast recovery diode, optimized for **high-frequency switching**, low conduction loss and robust avalanche capability.

For a field technician or design engineer, this component is a solid choice in demanding power stages where classic MOSFETs start to lose efficiency at high voltage and bipolar transistors switch too slowly.

Key Electrical Characteristics of G80N60UFD

The following table summarizes the main parameters typically found in the official datasheet (25 °C, unless noted). Always confirm against the latest datasheet of your specific manufacturer / batch.

Parameter	Symbol	Typical / Max Value	Notes
Collector-Emitter Voltage	V_{CES}	600 V	Repetitive, IGBT off
Continuous Collector Current @ 25 °C	I_C	80 A	With proper heatsink

Parameter	Symbol	Typical / Max Value	Notes
Pulsed Collector Current	I_{CP}	>160 A (typ.)	Limited by T_j
Gate-Emitter Voltage (max)	V_{GE}	± 20 V	Never exceed in drive design
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	~ 2.1 - 2.6 V @ 40-80 A	Strong conduction capability
Junction Temperature Range	T_j	-55 to $+150$ °C	Industrial class
Typical Gate Charge	Q_g	~ 160 - 200 nC	Important for driver sizing
Total Power Dissipation @ 25 °C Case	P_D	≈ 195 W	With ideal heatsink
Package Type	-	TO-3P / TO-247-3	Through-hole, isolated tab versions exist

Internal Structure and How the G80N60UFD Works

The **IGBT** combines:

- A **MOSFET gate structure** for *very high input impedance* and easy gate drive.
- A **bipolar output section** for *low on-state voltage* at high current.

In the G80N60UFD, the *ultrafast diode* is co-packaged with the IGBT die. This diode clamps inductive energy during free-wheel phases and is optimized for:

- **Low reverse recovery time ($t_{rr} \approx \text{tens of ns}$)**
- **Low reverse recovery charge (Q_{rr})**, reducing switching losses and EMI.

This makes the device suitable for switching frequencies typically between **15 kHz and 40 kHz**, depending on cooling and losses.

Comparison: G80N60UFD vs. FGH80N60FD vs. Classic 600 V MOSFET

To position the G80N60UFD in a design, it is useful to compare it with a close relative (**FGH80N60FD**, another 600 V / 80 A field-stop IGBT) and a generic **600 V MOSFET** around 60–70 mΩ $R_{DS(on)}$.

Feature / Device	G80N60UFD (UFD series)	FGH80N60FD (Field-stop) IGBT	Typical 600 V MOSFET 60–70 mΩ
Device Type	Ultrafast IGBT + Diode	Field-stop IGBT	Power MOSFET
V_{CES} / V_{DSS}	600 V	600 V	600–650 V

Feature / Device	G80N60UFD (UFD series)	FGH80N60FD (Field-stop)	Typical 60V MOSFET 60-70V
I_C / I_D (cont.)	80 A	80 A	40-50 A (depends on package)
Conduction Loss @ 40-50 A	Low ($V_{CE(sat)} \approx 2$ V)	Very low (≈ 1.8 V)	Higher ($I \times R_{DS(on)}$)
Switching Speed	Very fast (UFD)	Very fast (field-stop)	Fast but high capacitance
Best Frequency Range	10-30 kHz	10-30 kHz	Up to 60-80 kHz (at lower current)
Gate Drive	± 15 V typical	± 15 V typical	10-12 V typical
Ideal Applications	Motor drives, UPS, welding, induction heating	PFC, ESS, telecom, induction heating	SMPS, PFC, low power drives

Engineering conclusion:

At **80 A** level and **600 V bus**, the **G80N60UFD** offers *better efficiency and robustness* than many single MOSFETs, especially in applications where conduction loss dominates. The FGH80N60FD is a newer field-stop variant with slightly lower $V_{CE(sat)}$, but in many real installations the difference is small compared with cooling and PCB layout quality.

Typical Applications for G80N60UFD 600 V, 80 A

Because of its fast switching and strong current capability, this device is widely used in:

- **AC and DC motor drives** (industrial motors, pumps, fans, compressors).
 - **Inverter stages of solar, UPS, and battery storage systems** with 300–400 V DC buses.
 - **Induction heating and welding machines** where rapid current commutation is necessary.
 - **High-power SMPS and PFC stages** up to several kilowatts.
 - **Servo controls and robotics** requiring efficient torque control.
-

Practical Gate Drive and Protection

Considerations

Recommended Gate Drive Strategy

Parameter	Typical Design Value	Comment
Gate drive voltage	+15 V ON, 0 V or –5 V OFF	Negative off-bias improves immunity
Gate resistor R_{G}	5–15 Ω	Balance of dV/dt , EMI, losses
Gate driver type	Isolated driver with Miller clamp	For safe high-side / low-side control
Desaturation / over-current sense	Recommended	Rapid fault turn-off

Parameter	Typical Design Value	Comment
Gate-emitter Zener clamps	18-20 V	Protect gate from surges

Using too small a gate resistor may reduce switching losses but increases **dV/dt and EMI**, and can push the device into unsafe operating areas. Field experience shows that a **compromise around 8-12 Ω** works well for most industrial inverters.

Thermal Design and Heatsink Selection

IGBTs at this power level must be treated as *thermal devices* as much as electrical ones.

Approximate thermal path:

- Junction-to-case $R_{\theta JC} \approx 0.6-0.7 \text{ }^\circ\text{C/W}$
- Case-to-heatsink (with proper thermal grease and insulation) $\approx 0.2-0.3 \text{ }^\circ\text{C/W}$
- Heatsink-to-ambient $R_{\theta SA}$ chosen for required temperature rise

Example design thought:

If the G80N60UFD is expected to dissipate **60 W average**, and the maximum ambient is **40 °C**, you want junction temperature below **125 °C** for reliability:

- Allowed $\Delta T_{JA} \approx 125 - 40 = 85 \text{ }^\circ\text{C}$

- Required total $R_{\theta JA} = 85 / 60 \approx 1.4 \text{ }^\circ\text{C/W}$

Subtracting $R_{\theta JC} + R_{\theta CS}$ ($\sim 1.0 \text{ }^\circ\text{C/W}$) gives $\approx 0.4 \text{ }^\circ\text{C/W}$ for the heatsink. This means a *large finned heatsink, often with forced air* for continuous high-load operation.

Example Application Schematic: Single-Phase Inverter Leg Using G80N60UFD

Below is a simplified textual schema style you can graphically reproduce in your WordPress article:

- **DC Bus:** 325–400 V from rectified mains or battery bank
- **Upper Switch (Q1):** G80N60UFD
- **Lower Switch (Q2):** G80N60UFD
- **Freewheel Diodes:** co-pack diodes in each IGBT, no extra ultrafast diode normally needed
- **Gate Driver:** high-side/low-side driver IC with isolated supply (for example 15 V).
- **Snubber Network:** RC or RCD across each IGBT (e.g., 100 nF / 1–2 k Ω / 600 V film capacitor)
- **Current Sense:** shunt resistor or Hall sensor on the DC bus or emitter leg.
- **Control:** Microcontroller or DSP generating complementary PWM with dead-time (200–500 ns).

This half-bridge cell can be duplicated to create:

- Three-phase motor drives.

- Full-bridge inverters for UPS or photovoltaic systems.
- Push-pull or full-bridge induction heating converters.

Comparison of G80N60UFD With Lower-Power IGBT Devices

For designers stepping up from smaller IGBTs, the following table shows why the G80N60UFD is in a different league.

Parameter	30 A / 600 V IGBT (generic)	50 A / 600 V IGBT (generic)	G80N60UFD 80 A / 600 V
Continuous current	30 A	50 A	80 A
Peak current capability	~60 A	~100 A	≥160 A
Recommended max power stage	<2 kW	2-3 kW	3-6 kW or more
$V_{CE(sat)}$ at nominal current	≈2.2-2.5 V	≈2.2-2.5 V	Comparable or slightly lower
Package	TO-220 or TO-247	TO-247	TO-3P / TO-247-3 large tab
Cooling requirement	Medium	Medium-high	High, usually forced air

When your application moves beyond about **3 kW at 230 V AC**, investing in **G80N60UFD-class devices** plus serious thermal management is normally more economical than paralleling several smaller IGBTs.

Installation Tips, Field Notes and Reliability

Advice

From a practical maintenance and design point of view, these points can make the difference between a reliable inverter and a burner of semiconductors:

1. **Respect dV/dt limits**

Fast devices like the G80N60UFD generate steep voltage transitions. Keep loop area small (short bus bars, wide copper), and use **proper snubber networks** to limit overshoot.

2. **Gate drive layout**

Route gate and emitter (return) traces as a *twisted pair or very close tracks*. A shared emitter path with power current causes false turn-on through Miller capacitance.

3. **Heatsink and mounting**

- Use a *flat, clean surface*, thin thermal compound, and correct screw torque.
- Consider *insulating pads* if the collector tab must be isolated from chassis.
- After mounting, always check for **shorts between tab and heatsink** with a megohmmeter.

4. **Current sharing if paralleled**

Parallel use is possible but requires **careful design**: equal gate

resistors, matched wiring lengths, shared heatsink, and sometimes small emitter resistors to encourage current balancing.

5. **EMI compliance**

Use common-mode chokes, proper shielding, and LC filters on the mains or DC input. A badly filtered high-power IGBT bridge can exceed EMC limits easily.

6. **Protection coordination**

Combine **fast electronic protection** (desaturation, overcurrent, over-temperature) with **slower fuses or circuit breakers**. A fuse alone is not fast enough to save an IGBT at 80 A.

Advantages and Practical Benefits of Using G80N60UFD

- **Higher efficiency** in medium-frequency power converters compared with slower IGBTs and many high-voltage MOSFETs.
- **Integrated ultrafast diode** reduces component count and PCB area.
- **Robust structure** tolerates industrial environments and transient conditions when properly designed.
- **Good compromise between conduction loss and switching loss**, ideal for inverters running around 16–20 kHz.

For **HVAC compressors, industrial pumps and fans, welding machines, induction cookers or heaters**, upgrading an older design to G80N60UFD-class devices often results in:

- Lower operating temperature of the power stage.
- Better efficiency (sometimes several percentage points).

- Increased reliability and longer service intervals.
-

Design Recommendations and Professional Advice

1. **Start from the datasheet safe operating area (SOA).**

Do not design only from RMS current. Check *short-circuit withstand time*, repetitive peak current, and switching SOA.

2. **Simulate first, verify later.**

Use SPICE or vendor models for G80N60UFD (or SGH80N60UFD / FGH80N60FD equivalents) to simulate switching losses and junction temperature over a complete load cycle.

3. **Always measure in the real system.**

A good **differential probe** and **current clamp** are essential to verify waveforms, dV/dt , and peak currents. Adjust gate resistors and snubbers based on real measurements, not only theoretical calculations.

4. **Plan for serviceability.**

Place IGBTs on easily accessible heatsink areas, label them clearly, and keep some mechanical margin so modules can be replaced without damaging PCB traces.

5. **Document thermal and electrical limits in the maintenance manual.**

Technicians must know maximum current, duty cycle, and temperature targets. This reduces the risk of *field modifications* that push devices out of their safe area.

Focus Keyphrase (≤191 characters)

G80N60UFD IGBT 600 V 80 A ultrafast transistor, TO-3P power switch for motor drive, inverter, induction heating, welding, UPS, PFC and high-efficiency industrial converters

SEO Title

G80N60UFD IGBT 600 V, 80 A - Ultrafast Power Transistor for Motor Drives, Inverters, Induction Heating and Welding | Mbsmpro.com

Meta Description

A detailed engineering guide to the G80N60UFD 600 V, 80 A ultrafast IGBT. Characteristics, comparison with other 600 V devices, thermal design, gate drive, inverter schematics, and professional tips for reliable industrial power stages.

Slug


g80n60ufd-igbt-600v-80a-ultrafast-transistor-to-3p

Tags

G80N60UFD, 600V IGBT, 80A IGBT, ultrafast IGBT transistor, TO-3P power transistor, motor drive inverter, induction heating IGBT, welding inverter IGBT, UPS PFC switch, power electronics design, gate driver design, thermal management IGBT, industrial converter, Mbsmgroup, Mbsm.pro,

Excerpt (first 55 words)

The G80N60UFD is an ultrafast 600 V, 80 A insulated-gate bipolar transistor in a robust TO-3P package, designed for high-efficiency industrial inverters. Combining MOSFET-like gate control with low saturation voltage and a co-pack fast recovery diode, it is ideal for motor drives, induction heating, welding machines, UPS and PFC stages.

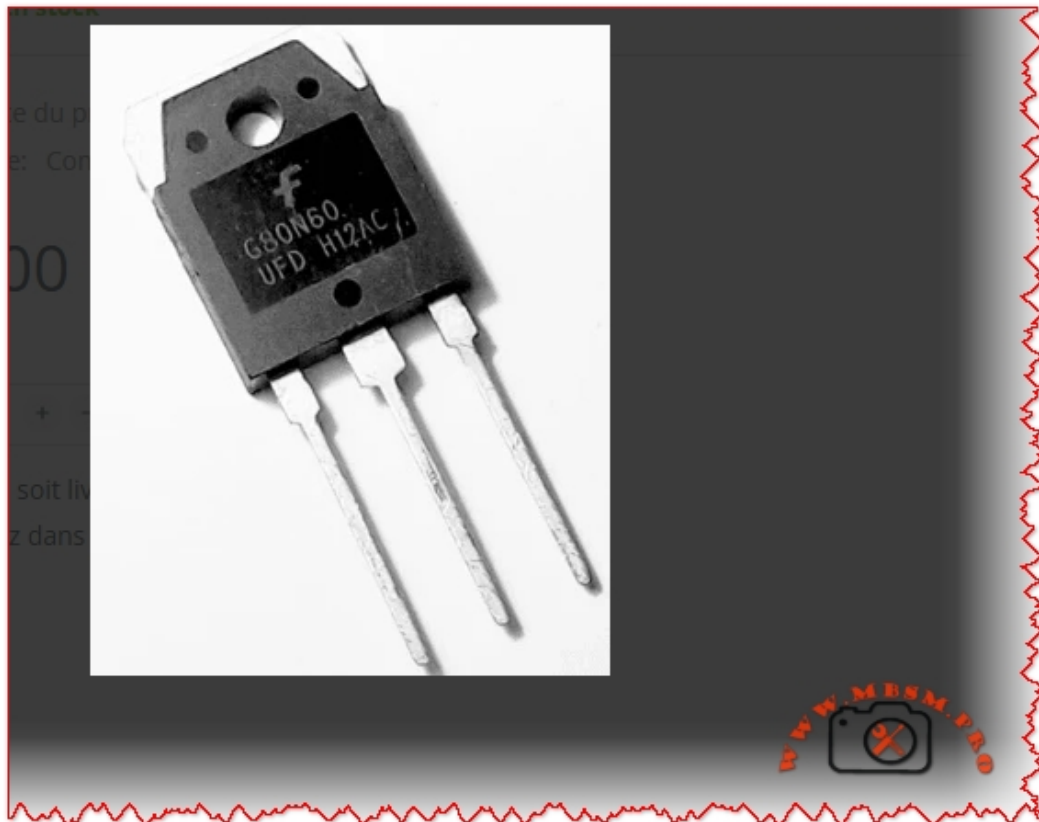

Transistor IGBT, G80N60UFD, 600 V, 80 A mbsmpro

[SGH80N60UFD-890113Download](#)

Latest Articles

- [Guide de Dépannage de la Carte Inverter : Climatiseur Kolin KSM-IW20WAE](#)
- [RCFF-2HP Capillary Tube for a Samsung 18000 BTU air conditioner](#)
- [Carbon brushes washing machine motors](#)
- [Chauffe-eau Junkers : Restauration d'un Classique](#)
- [WS57H Compressor, 1/6 hp, Capacitor Requirement 4mf](#)
- [Hisense inverter expert, installtion](#)
- [Copeland D3DS5-100X 10 HP Freezer Compressor](#)
- [Bitzer 6G-30.2Y: The High-Performance 30 HP Semi-Hermetic](#)
- [Réparer un chauffe-eau à gaz Olympic 6L](#)
- [Best piping practices for semi-hermetic systems](#)
- [Core ChauffeEau Junkers Mid-1980s to Late 1990s](#)
- [Not recommended R410A to R407c](#)
- [Details of refrigerant R134a](#)
- [The electrical circuit for a timer-based steam refrigerator is an interesting one](#)
- [Changing Filter 1/5 Hp](#)
- [1/5 HP Compressor oil change: How much and how to do it right](#)
- [Deep cleaning AC units from A to Z... that's our craft](#)
- [Plumbing Fittings Explained](#)
- [Can the GL80 compressor be installed in place of the GL90?](#)
- [The process of replacing the air conditioner compressor is successful, and it is working as it was before ?](#)